



weighing terminal HTF600

freely programmable | can be calibrated | universal

Advantages


- Ethernet connection can be integrated
- Modular interface concept
- Direct access to files in a PC network
- Extensible LCD display
- Customer-specific modifications possible

The Universal One!

The HTF600 is a high performance industrial terminal in a stainless steel housing for scales in goods inward and dispatch departments, for control of dispensing for recipe scales, to control the filling of drums or big bags and for weighing systems with customer-specific, special programs.

Features

- Wall-mounting, tabletop and build-in versions in protection class IP 65
- 4x20 character LCD display with background illumination and display of weight, 19 mm high
- Integrated alphanumeric keyboard through multiple use of keys and function keys
- PC keyboard can be connected
- Operating temperature: -10 to +40°C at 95% rel. humidity
- PC software to design printouts
- Powered via integrated 110-240 VAC or 12-30 VDC supply
- Security: Data protected from power failure, password protection, internal alibi memory
- Modular concept
- Remote diagnostics possible

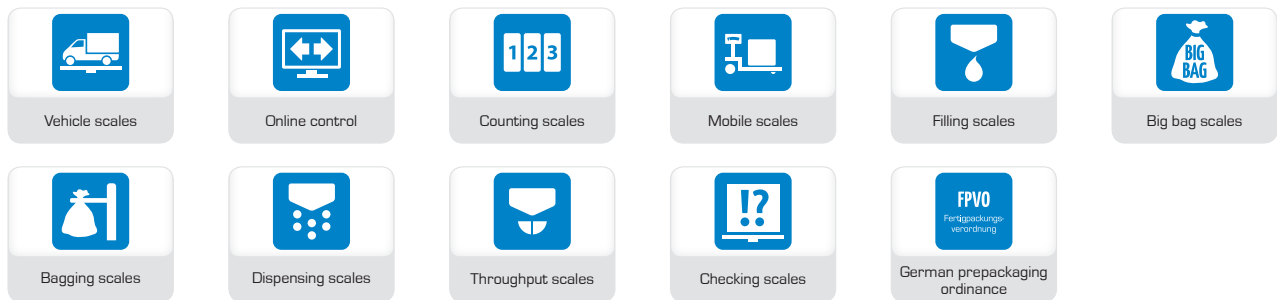

	serial interfaces (max. 4)			Digital/analog interfaces		Field bus		Ethernet
	RS 232	RS 485	RS 422	Optoisolated inputs/outputs 24 VDC (max. 4)	15 bit analog input/output (max. 2)	Profibus DP 12 MBit/s	Modbus RTU	10/100 Base-T Ethernet with integr. web server
Relay / transistor coupling (max. 64 inputs/outputs)		■	■					
Modular analog interface (max. 32 inputs/outputs)		■	■					
Printer	■	■	■					■
Precision scales	■	■	■					
Remote display	■	■	■					
Transponder reader	■	■	■					
Scanner/keyboard	■							
PLC system				■	■	■	■	■
PC/network								■

Further options on request.



Höfelmeyer Waagen GmbH | Georgsmarienhütte | Hüfingen | Neuss | Hamburg | Berlin | Leipzig
 Tel. +49 5401 4977 0 | Fax +49 5401 4977 90 | waagen@hoefelmeyer.de | www.hoefelmeyer.de

We reserve the right to make changes.